Encroachments

This area, measured from edge of the through driving lane, will be free of obstacles except (Traffic signals, railroad signals, railroad tracks, roadway lighting, mailboxes, and traffic control devices) Minimum fixed obstacle clearance for a curbed section shall be 2 Feet as measured from back of curb, or for a non curbed section shall be 8 Feet.


Stoop - Rail - Wall




Steps - Fence Rail



Stairs - Wall

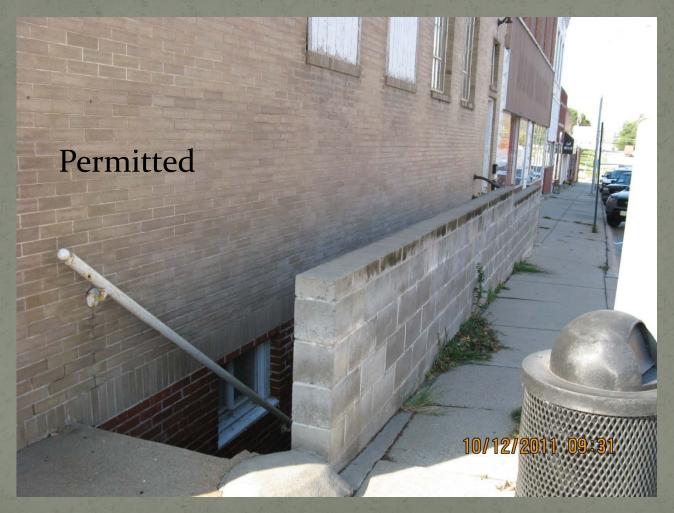

Wall - Stairs - Railing - Raised Sidewalk - Awning - Sign

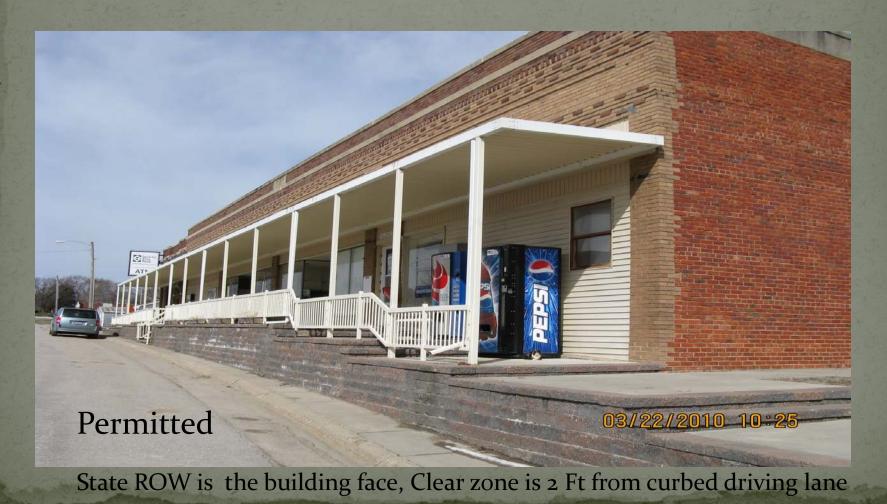

Sign



Sign



Awning - Sign



Awning - Sign - Entryway Seating Area - Air conditioner



Air conditioner



State ROW is the building face, Clear zone is 2 Ft from curbed driving lane

Awning



Fence



Fence on State ROW, Clear zone is 2 Ft from back of curb driving lane in municipal state Hwy

Monitor Station



Illegal Mailbox Post



60 Mph Clear zone is 30 Ft from edge of road, Or Mailbox needs to be mounted on breakaway post

Phone booth



Phone booth is on State ROW and not Permitted on Municipal State Hwy

Flowerbox



60 Mph Clear zone is 30 Ft from edge of pavement

Retaining Wall



60 Mph Clear zone must be 30 feet from edge of Hwy

Gates



60 Mph Clear zone must be 30 ft from edge of road for Gates

Post in Clear Zone



60 Mph Clear zone is 30 ft, and gate post are 30 ft from edge of road

